



MIB 303 AC Separation System, Module

# System Reference

Product No.	1765785-80
Printed Book No.	Aug 1997 1810598-02 V1

Alfa Laval reserve the right to make changes at any time without prior notice.

Any comments regarding possible errors and omissions or suggestions for improvement of this publication would be gratefully appreciated.

Copies of this publication can be ordered from your local Alfa Laval company.

**Published by:** Alfa Laval Separation AB  
Marine & Power Division  
S - 147 80 Tumba  
Sweden

© Copyright Alfa Laval Separation AB 1997.

---

# Contents

---

<b>1</b>	<b>Technical Data</b>	<b>1</b>
<b>1.1</b>	<b>Separation System</b>	<b>1</b>
<b>1.2</b>	<b>Separator</b>	<b>2</b>
<b>1.3</b>	<b>Counter Pressure in Oil Outlet</b>	<b>3</b>
1.3.1	Determining max. counter pressure in oil outlet, lube oil	3
1.3.2	Viscosity/Temperature Diagram	4
1.3.3	Viscosity/Counter Pressure Diagram.	5
<b>2</b>	<b>Drawings</b>	<b>7</b>
<b>2.1</b>	<b>Assembly Drawings</b>	<b>7</b>
2.1.1	Assembly Drawing	8
2.1.2	Basic Size	11
<b>2.2</b>	<b>Interconnection and Circuit Diagrams</b>	<b>12</b>
2.2.1	Cable List	12
2.2.2	Starter/Control Unit Interconnection Diagram	13
2.2.3	Starter/Control Unit Circuit Diagram	14



---

# 1 Technical Data

---

## 1.1 Separation System

<b>Separator</b>	MIB 303 S-13/S-33																
<b>Application</b>	Cleaning of oil used for marine and power diesel engines, with a maximum density of 920 kg/m <sup>3</sup> at 15 °C. Cleaning of steam turbine lubricating oil.																
<b>Capacity and separation temperature</b>	<table><thead><tr><th></th><th>Viscosity</th><th>Max. rec. capacity</th><th>Max. separation temp.</th></tr><tr><th></th><th>cSt/40 °C</th><th>l/h</th><th>°C</th></tr></thead><tbody><tr><td>Lube oil</td><td>≤150</td><td>300 l/h at 50Hz 360 l/h at 60Hz</td><td>70</td></tr><tr><td>Marine diesel oil</td><td>≤ 14</td><td>630 l/h at 50 Hz 760 l/h at 60 Hz</td><td>40</td></tr></tbody></table>		Viscosity	Max. rec. capacity	Max. separation temp.		cSt/40 °C	l/h	°C	Lube oil	≤150	300 l/h at 50Hz 360 l/h at 60Hz	70	Marine diesel oil	≤ 14	630 l/h at 50 Hz 760 l/h at 60 Hz	40
	Viscosity	Max. rec. capacity	Max. separation temp.														
	cSt/40 °C	l/h	°C														
Lube oil	≤150	300 l/h at 50Hz 360 l/h at 60Hz	70														
Marine diesel oil	≤ 14	630 l/h at 50 Hz 760 l/h at 60 Hz	40														
<b>Sealing Water</b>	Temperature Maximum hardness Minimum pH value Salinity	5 – 70 °C 180 ppm (CaCO <sub>3</sub> 10 °dH) 6 maximum 60 ppm chloride (equivalent to 100 ppm NaCl)															
<b>Normal working counter pressure</b>	0.4 – 0.6 kPa																
<b>Maximum counter pressure</b>	See diagrams on pages 4 and 5																
<b>Low pressure switch set point</b>	30 kPa																
<b>Total power consumption</b>	Max. 700 W																

<b>Shipping data</b>	Net weight	72 kg
	Gross weight	102 kg
	Volume	0.58 m <sup>3</sup>

<b>Manufacturing materials</b>	Separator Frame	aluminium alloy
	Separator Bowl	aluminium and plastics
	Module Frame	iron

## 1.2 Separator

		50 Hz	60 Hz
Speed	Drive motor	7300 rpm	7300 rpm
	Bowl spindle max.	7300 rpm	7300 rpm

<b>Miscellaneous</b>	Starting time max.	40 seconds
	Stopping time with built-in electric brake max.	1 minute
	Maximum operating time without oil feed	120 minutes
	Motor power	450 W

<b>Bowl data</b>	Sludge space	0.3 litres
------------------	--------------	------------

## 1.3 Counter Pressure in Oil Outlet


### 1.3.1 Determining max. counter pressure in oil outlet, lube oil

To determine the max. counter pressure in the oil outlet, e.g in cases of high delivery height, first measure the working temperature in the actual lube oil. Refer to “Viscosity/Temperature Diagram” on page 4 to determine the oil viscosity at working temperature. “Viscosity/Counter Pressure Diagram.” on page 5 gives the max. value in kPa of the counter pressure suitable for this viscosity and flow. If a higher counter pressure is applied, the separator will overflow.

Example:

ISO VG 68 is to be used at separation temperature 65 °C. The Viscosity/Temperature diagram on page 4 gives a viscosity of 24 cSt. This is used to determine the max. counter pressure in the oil outlet with the help of the Viscosity/Counter Pressure diagram on page 5. In this case 89 kPa for a flow of 380 l/h, and 72 kPa for a flow of 450 l/h.


### 1.3.2 Viscosity/Temperature Diagram

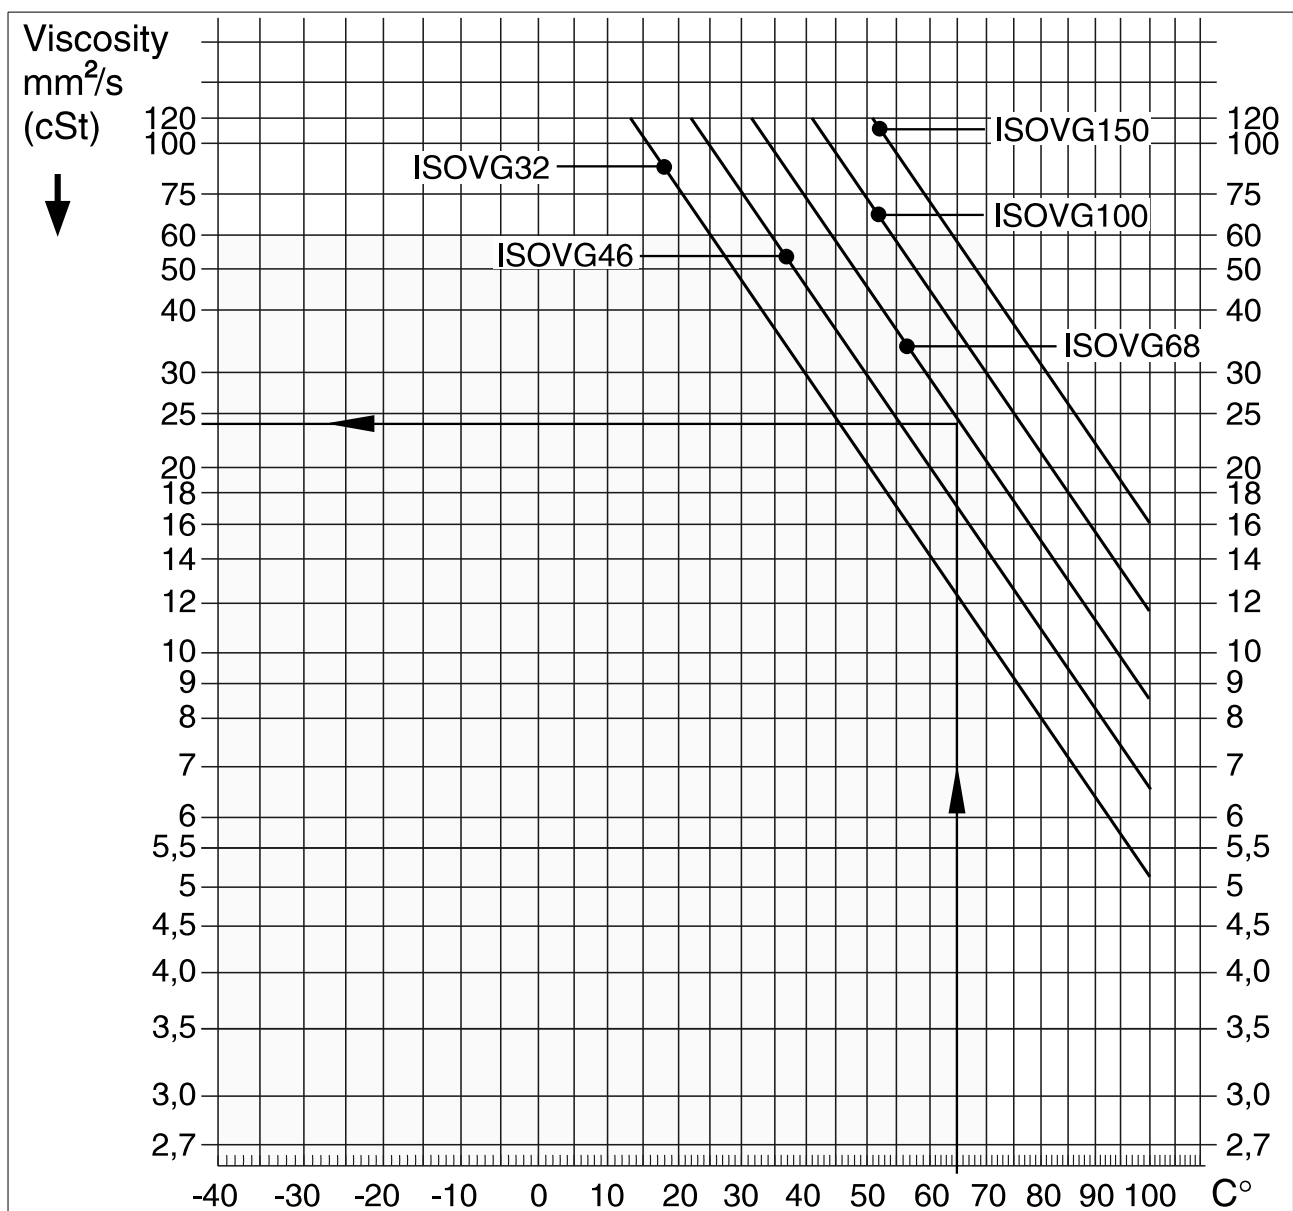

The shaded area shows the relevant working intervals.



### 1.3.3 Viscosity/Counter Pressure Diagram.

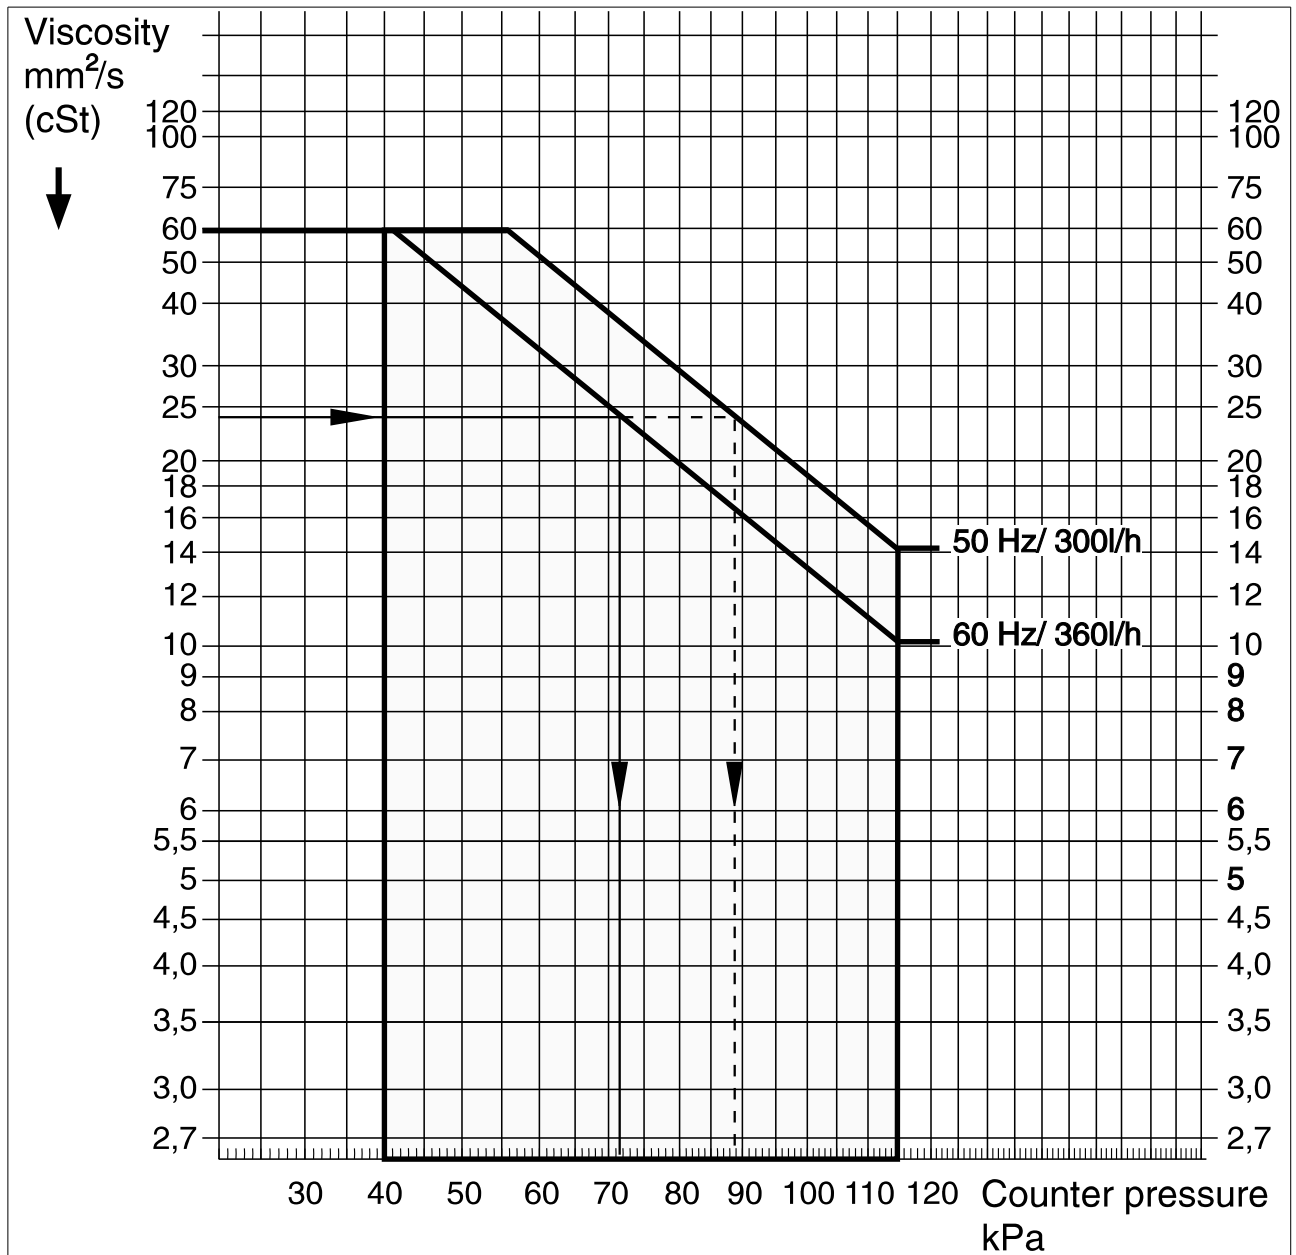

The shaded area shows the relevant working intervals.




---

## **2 Drawings**

---

### **2.1 Assembly Drawings**

### 2.1.1 Assembly Drawing

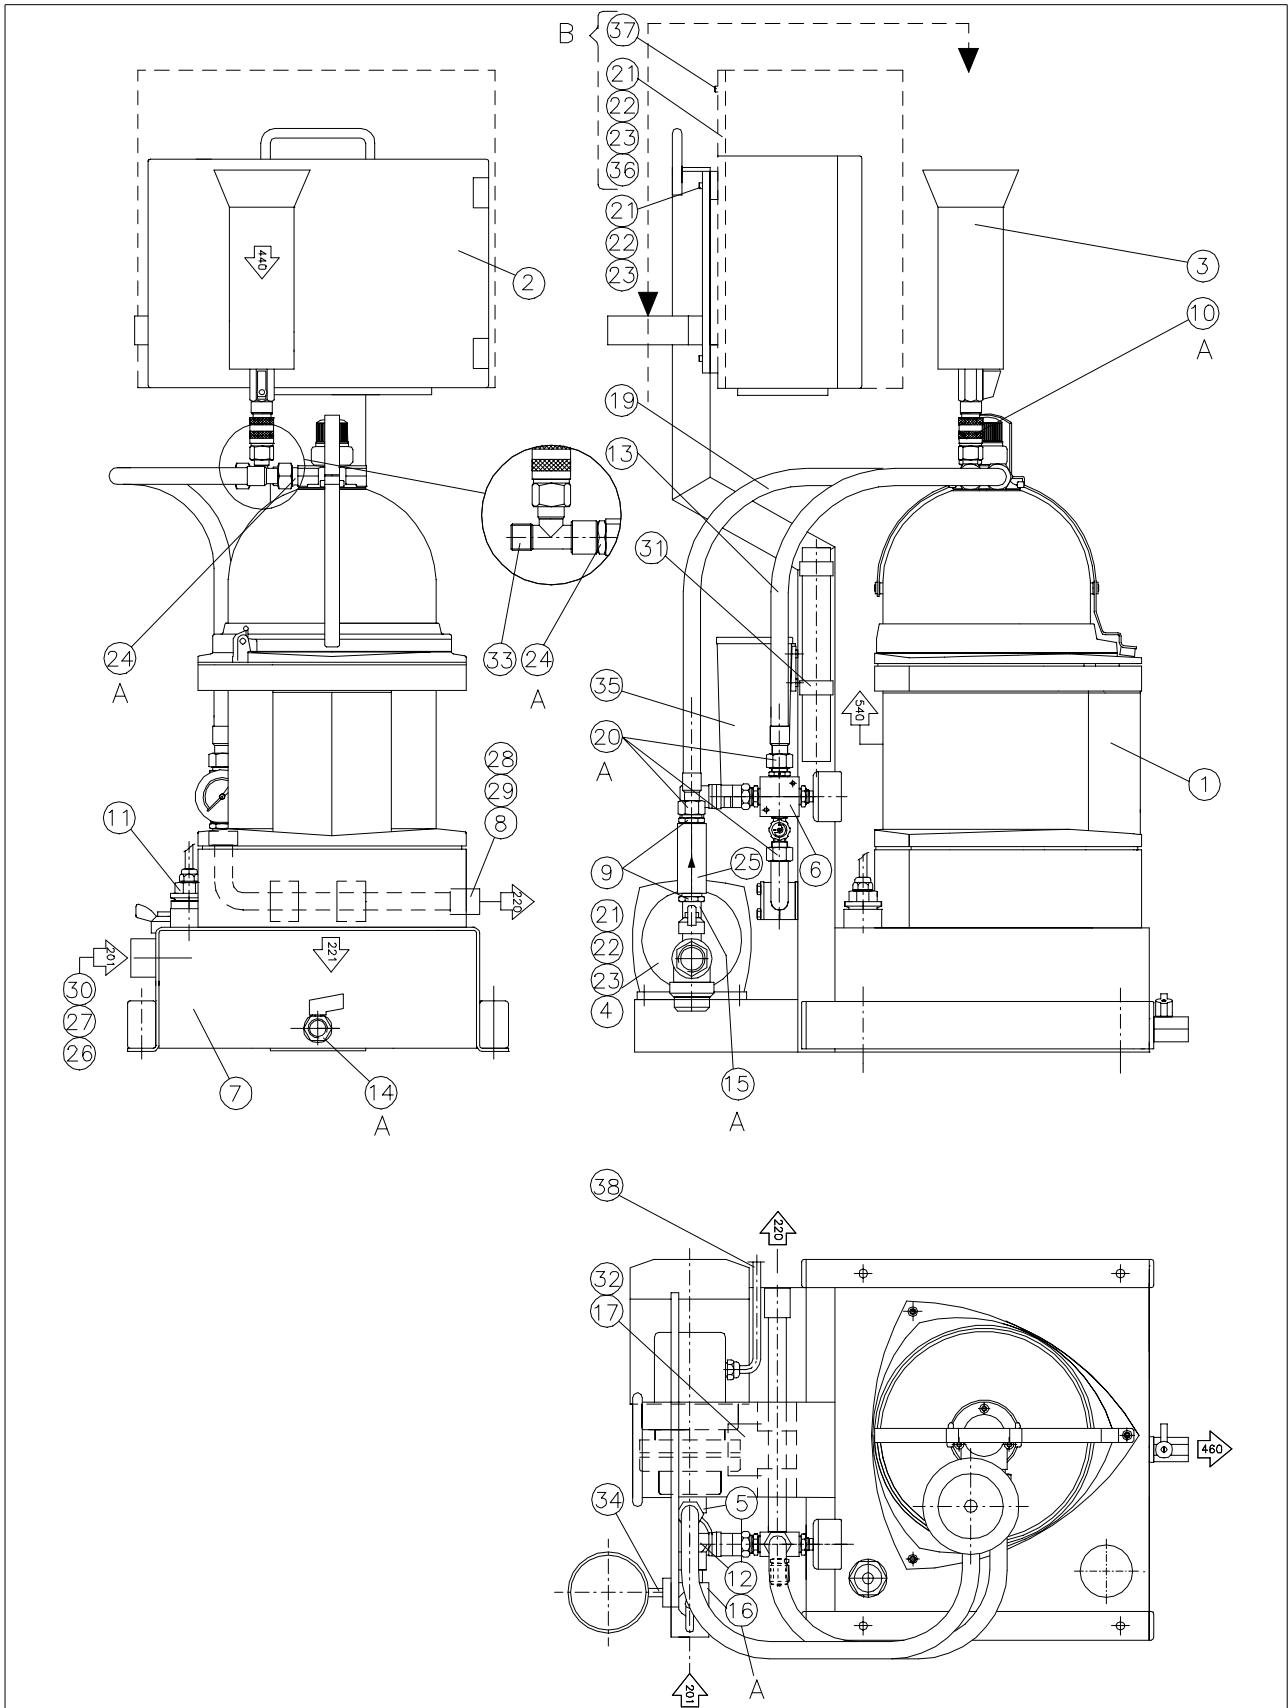


Ref. 1765785 Rev. 0

XI05539A

## Item Description

### Legend


	<b>Flow</b>
201	Oil inlet
220	Clean oil outlet
221	Water outlet (to collecting tank)
440	Water for water seal
460	Drain
540	Ventilation
XS2	Emergency stop (optional)
	Wheel set (optional)
A	Sealed with LOCTITE 542
B	Only for 24V DC separator

### Basic Equipment

Item	Description	Qty.	Article no.
1	Separator MIB 303 S-13/S-33	1	881176-06-01
2	Starter/control unit	1	1764566-01
3	Funnel complete (Purifier only)	1	1764481-80
4	Pump incl. motor and capacitor; According to order	1	1764696-80
4	Pump incl. motor and capacitor; According to order	1	1764696-81
5	Nipple	1	1765126-01
6	Outlet piece with pressure switch	1	1764732-80
7	Frame	1	1764642-80
8	Pipe bend	1	1764229-80
9	Nipple	2	1764373-02
10	Quick-coupling with non-return valve (Purifier only)	1	1764716-01
11	Level switch	1	1764646-01
12	Strainer	1	1763904-01
13	Flexible hose	2	1764241-01
14	Ball valve	1	1764474-01

Item	Description	Qty.	Article no.
15	Angular nipple	1	1764751-01
16	Ball valve	1	1764589-01
17	Product label	1	1765250-01
19	Gasket	2	546229-30
20	Rectangular ring	3	546229-07
21	Screw	8	221030-49
22	Nut	8	221803-02
23	Washer	8	223101-47
24	Nipple	2	1764491-01
25	Non-return valve	1	1764588-01
26	Label "IN"	1	1763111-01
27	Label "OIL"	2	1763111-05
28	Label "OUT"	1	1763111-02
29	Protection plug	1	1764382-01
30	Protection plug	1	1764382-02
31	Cable protection	1	1764656-01
32	Drive screws	4	66169
33	T-pipe	1	1763699-02
34	Support for funnel	1	1764722-01
35	Tool box	1	1764726-80
38	Cable for pump motor	1	1765129-01
2-38	Ancillary kit	1	1765785-21

### 2.1.2 Basic Size

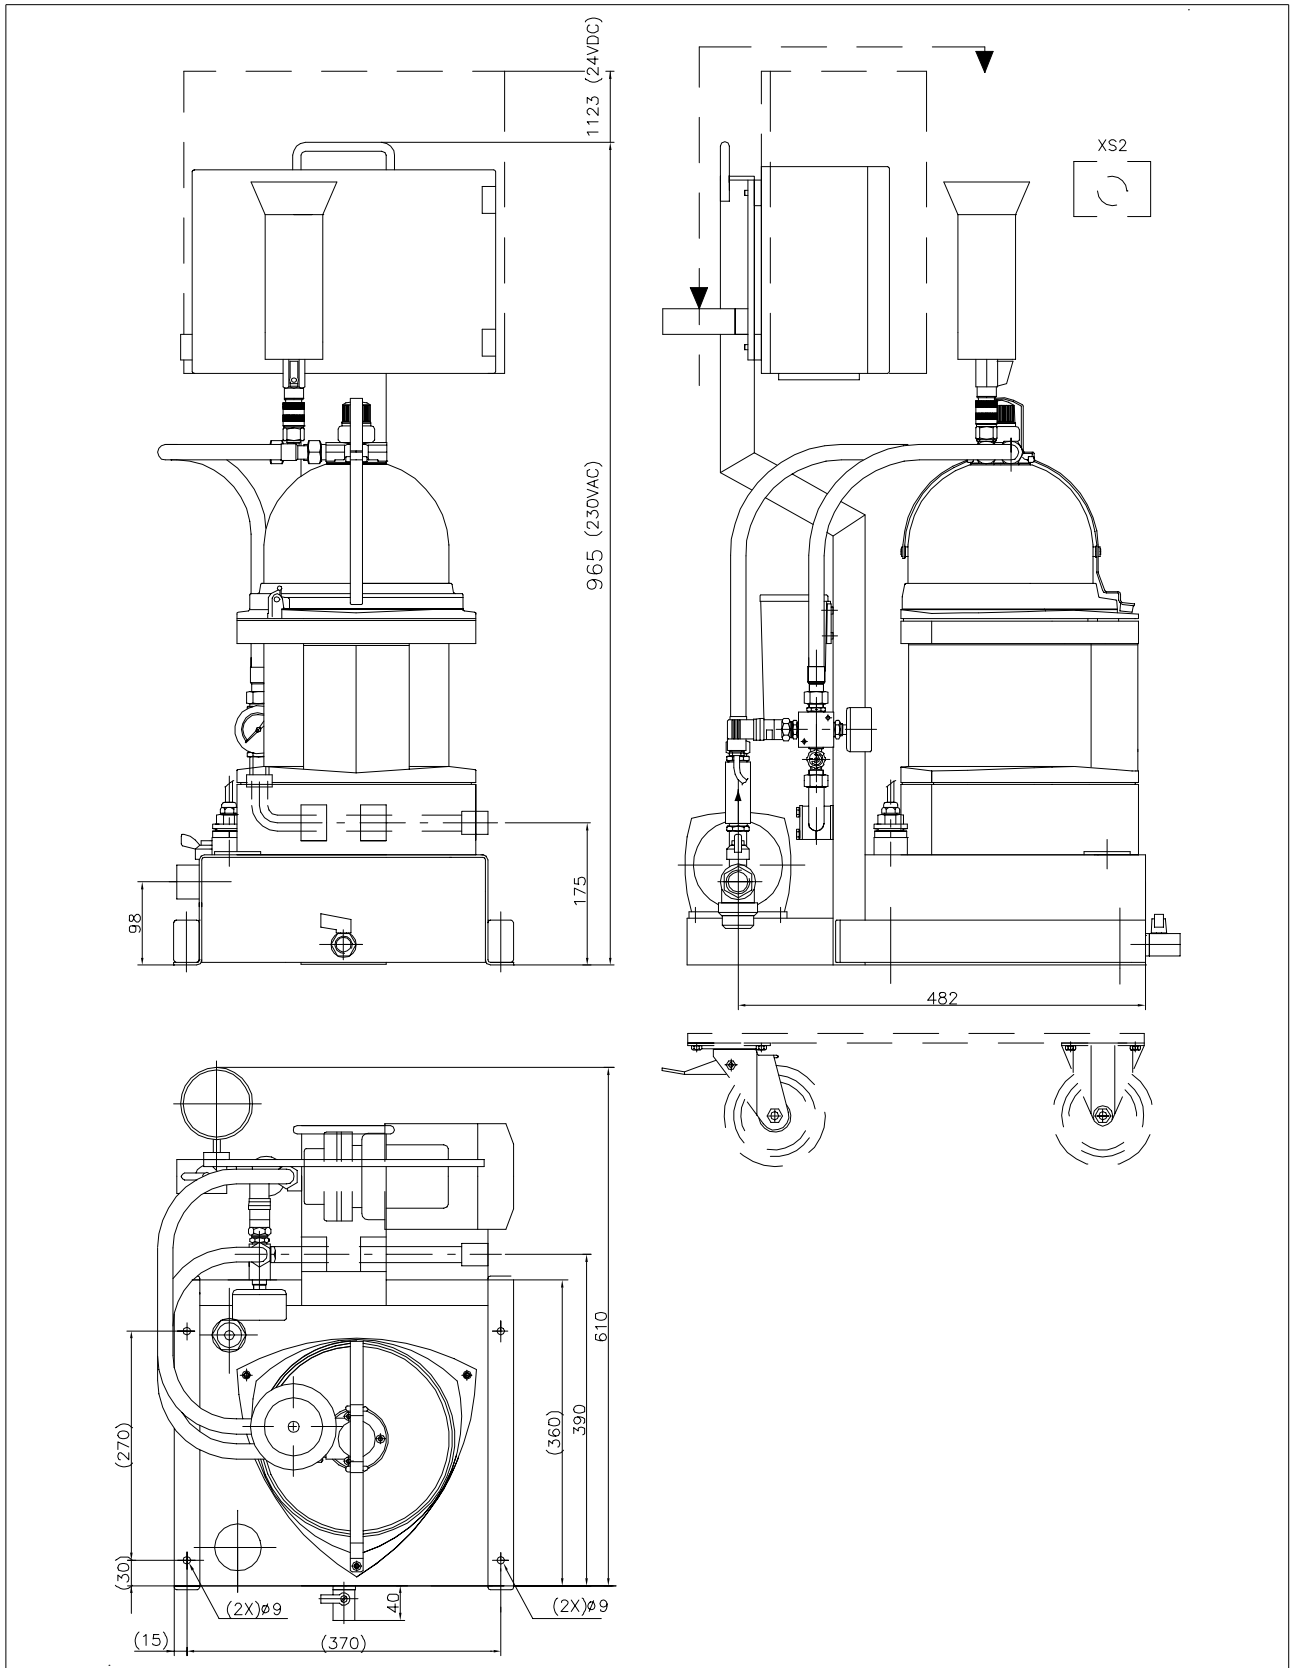

Ref. 1765784 Rev. 0

X00178BA

## 2.2 Interconnection and Circuit Diagrams


### 2.2.1 Cable List

No.	Type		Connection point A	Instruction	Connection point B	Remarks
1	RCOP	3 x 1.5	Mains supply		Starter/CU	Max. fuse 10 A
3		9 x 1.5	Separator		Starter/CU	Supplied with separator
4	RADOX 125	3 x 0.75	Starter/CU		Level switch	
5	RADOX 125	3 x 0.75	Starter/CU		Pressure switch	
6	RADOX 125	3 x 0.75	Starter/CU		Feed pump	

Other equivalent and approved cables may be used.




### 2.2.2 Starter/Control Unit Interconnection Diagram

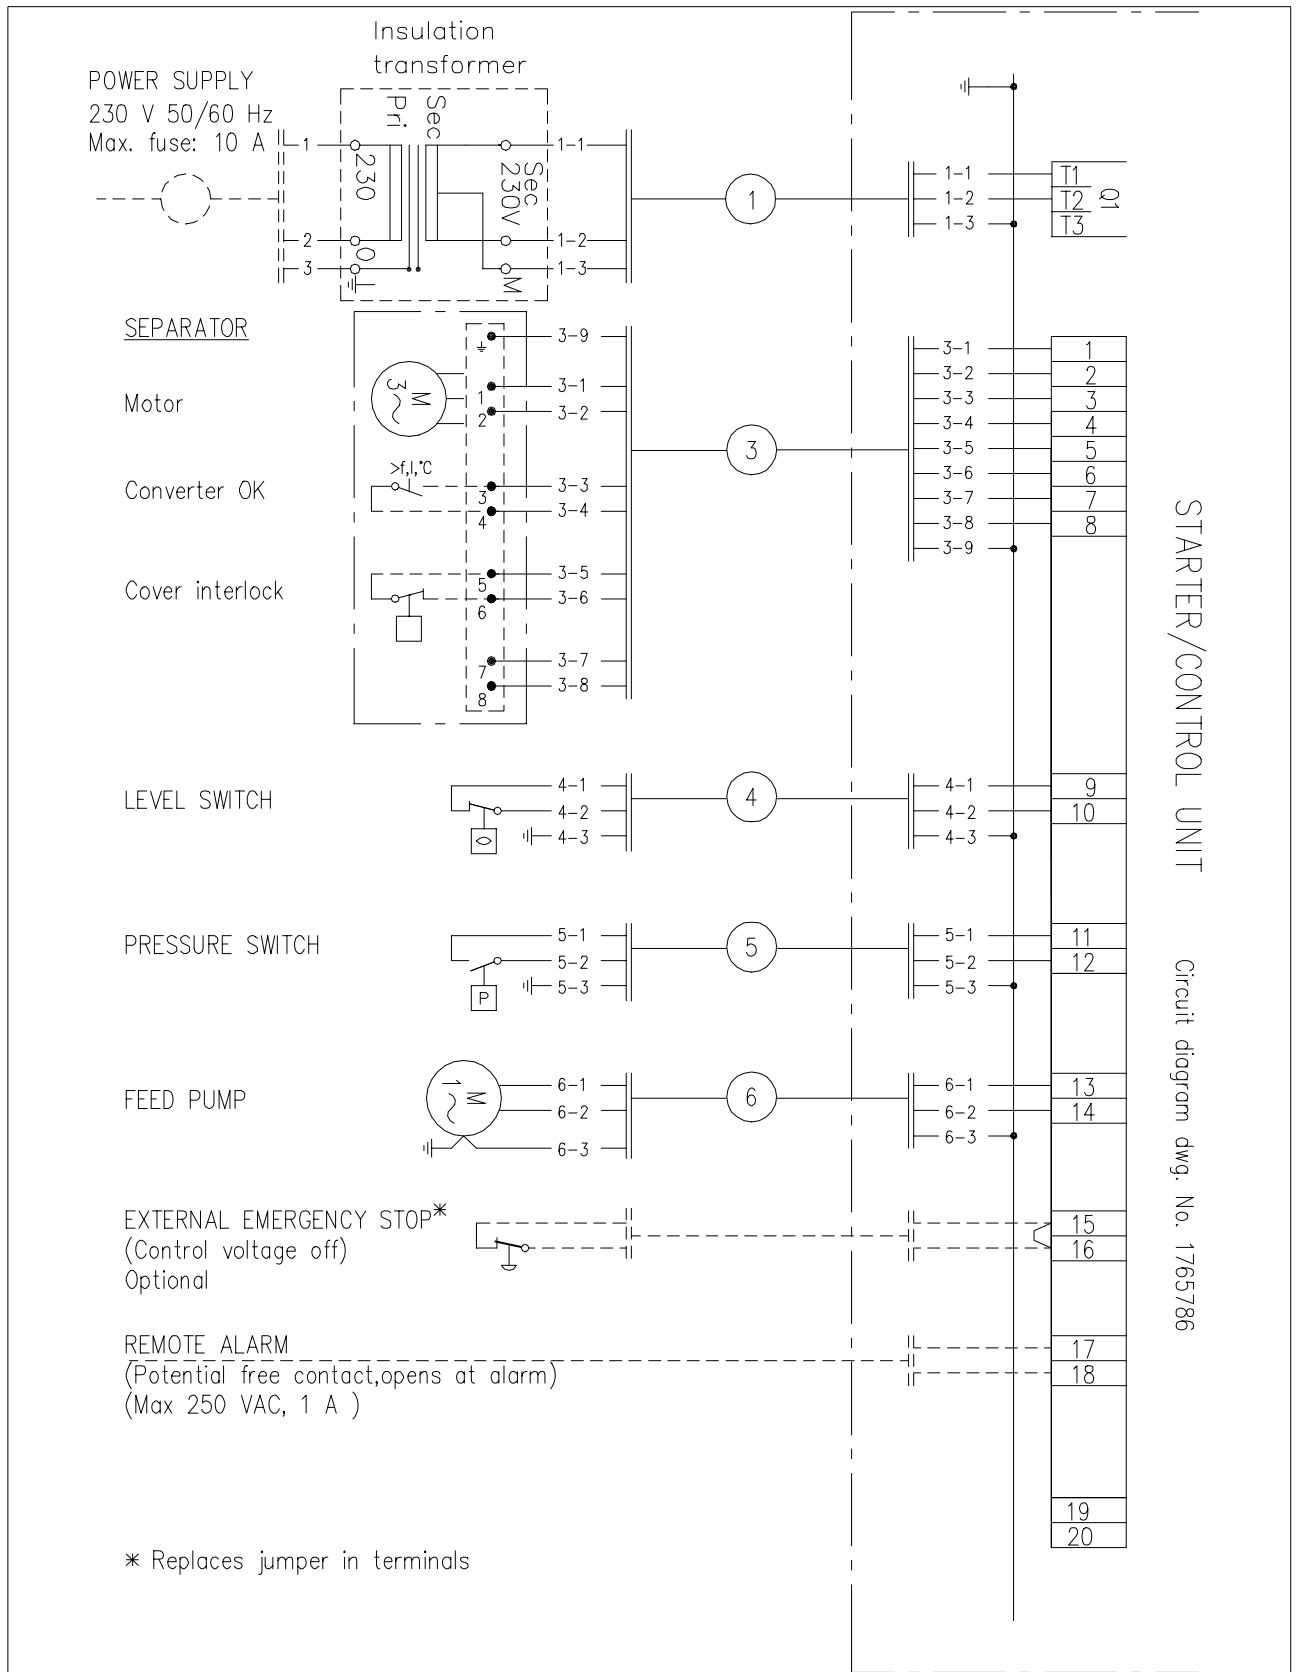

Ref. 1765787 Rev. 0

2.2.3 Starter/Control Unit Circuit Diagram

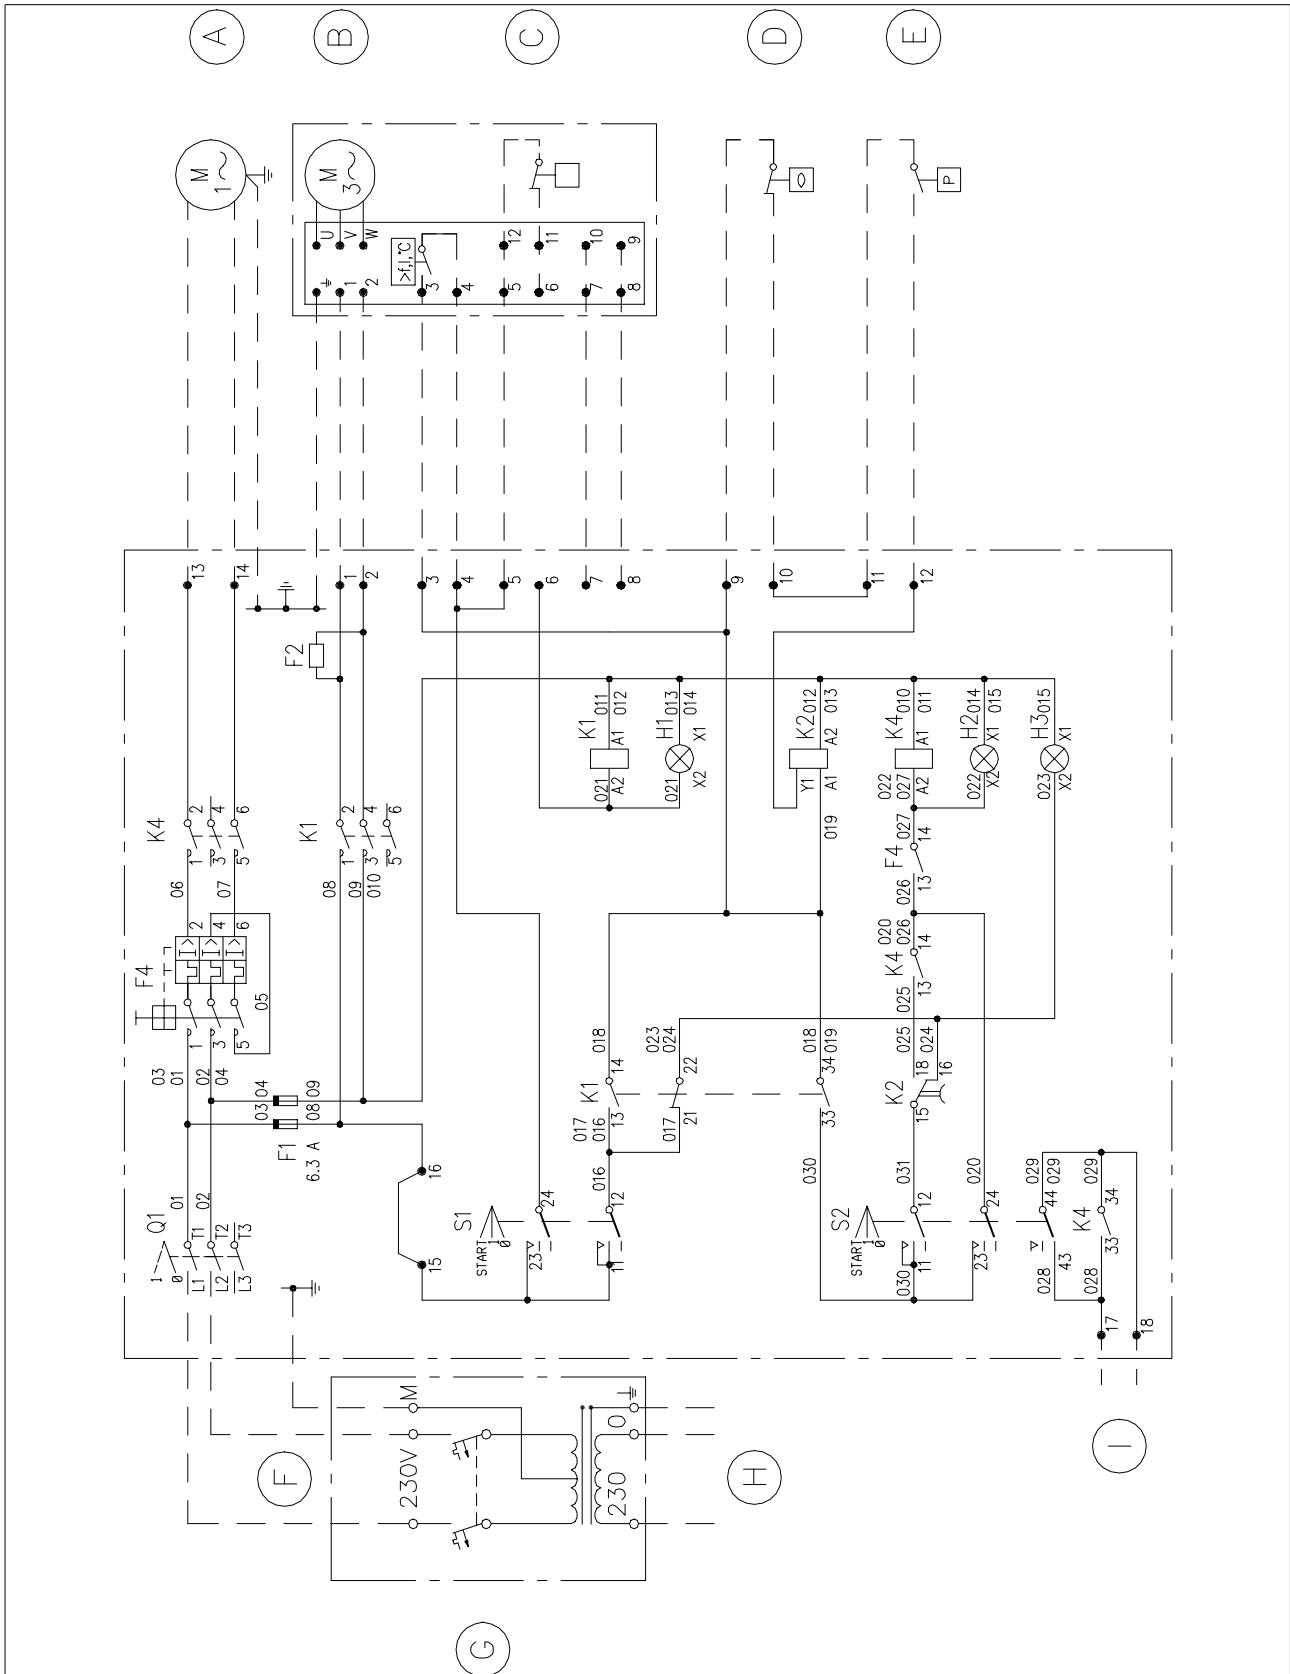

X006041A

Ref. 1765786 Rev. 0

**Circuit Diagram Description**

<b>Item</b>	<b>Description</b>
A	Feed pump
B	Separator
C	Cover interlock
D	Level switch (optional)
E	Pressure switch (optional)
F	Secondary power supply (optional)
G	Insulation transformer (optional)
H	Primary power supply 230V 50/60 Hz, fuse 10 A
I	Remote alarm

