




7.10.1.2-1 Technical data and dimensions, 025 L6

TECHNICAL DATA


Pump: The pump is of positive displacement type
 Media: Fuel oil and lubricating oil
 Media temperature: Max 120°C
 Max feeding pressure: 0,3 MPa (3 bar)
 Material pump body: Nodular cast iron
 Material pump screw: Steel and cast iron
 Suction head 4 m WG manometric
 0 m WG manometric for 2800 rpm and 3400 rpm
 Built on safety valve: Opening setting 0,6 MPa (6 bar)
 Motor: Totally enclosed three phase motor for marine applications
 insulation acc. to class F
 Enclosure: IP55

Dimensions in mm

1762161-90	690	60	3400	565347-16	0,9	1,1	17,5
1762161-89	690	60	1700	551586-17	0,5	0,8	16
1762161-88	690	60	1100	551585-18	0,33	0,7	16,5
1762161-87	690	50	2800	565347-07	0,75	1,0	17,5
1762161-86	690	50	1400	551586-11	0,37	0,7	16
1762161-85	690	50	900	551585-14	0,25	0,5	16,5
1762161-84	575	60	1700	551586-06	0,50	0,92	16
1762161-83	480	60	3400	565347-13	0,9	1,6	17,5
1762161-82	480	60	1700	551586-15	0,5	1,1	16
1762161-81	480	60	1100	551585-08	0,33	0,90	16,5
1762161-80	460	60	3400	565347-12	0,9	1,7	17,5
1762161-79	460	60	1700	551586-14	0,5	1,1	16
1762161-78	460	60	1100	551585-07	0,33	0,95	16,5
1762161-77	440	60	3400	565347-11	0,90	1,8	17,5
1762161-76	440	60	1700	551586-05	0,50	1,2	16
1762161-75	440	60	1100	551585-05	0,33	1,0	16,5
1762161-74	400	50	2800	565347-02	0,75	1,7	17,5
1762161-73	400	50	1400	551586-07	0,37	1,1	16
1762161-72	400	50	900	551585-10	0,25	0,9	16,5
1762161-71	230	60	3400	565347-18	0,9	3,4	17,5
1762161-70	230	60	1700	551586-18	0,5	2,3	16
1762161-69	230	60	1100	551585-09	0,25	1,4	16,5
1762161-68	230	50	2800	565347-09	0,75	3,0	17,5
1762161-67	230	50	1400	551586-12	0,37	2,0	16
1762161-66	230	50	900	551585-11	0,25	1,6	16,5
1762161-65	—	—	—	Pump without motor	—	—	10
Article No.	—	—	—	Motor (included)	—	—	Weight
Complete Set	—	—	—	Article No.	—	—	(kg)
—	—	—	—	—	—	—	A

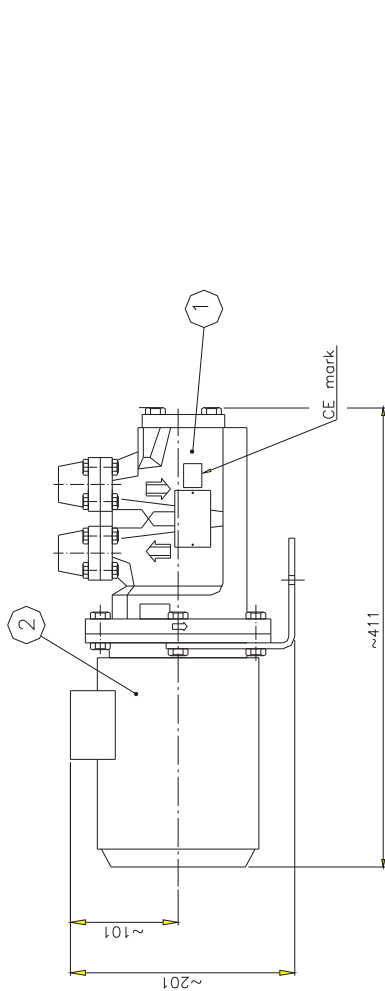

PUMP WITH MOTOR

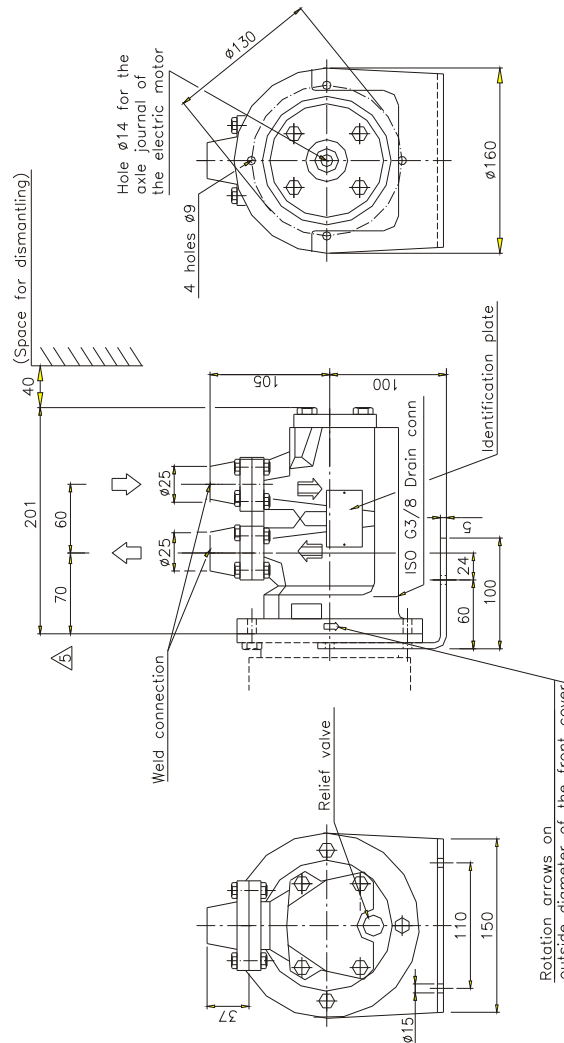

PUMP WITHOUT MOTOR

Ref. 1762161 Rev. 5