



7.10.1.2-3 Technical data and dimensions, 032 L3


TECHNICAL DATA

Pump: The pump is of positive displacement type
 Media: Fuel oil and lubricating oil
 Media temperature: Max 120°C
 Max feeding pressure: 0,3 MPa (3 bar)
 Material pump body: Nodular cast iron
 Material pump screw: Steel and cast iron
 Suction head: 4 m WG monometric
 0 m WG monometric for 2800 rpm and 3400 rpm
 Built on safety valve: Opening setting 0,6 MPa (6 bar)
 Motor: Totally enclosed three phase motor for marine applications
 Enclosure: IP55

Dimensions in mm

1764502-90	690	60	3400	565192-16	1,8	2,2	30
1764502-89	690	60	1700	551590-18	1,3	1,9	30
1764502-88	690	60	1100	551613-18	0,9	1,5	29,5
1764502-87	690	50	2800	565192-07	1,5	1,9	30
1764502-86	690	50	1400	551590-14	1,1	1,6	30
1764502-85	690	50	900	551613-14	0,75	1,3	29,5
1764502-84	575	60	1700	551590-06	1,3	2,2	30
1764502-83	480	60	3400	565192-13	1,8	3,1	30
1764502-82	480	60	1700	551590-08	1,3	2,8	30
1764502-81	480	60	1100	551613-08	0,9	2,3	29,5
1764502-80	460	60	3400	565192-12	1,8	3,2	30
1764502-79	460	60	1700	551590-07	1,3	2,8	30
1764502-78	460	60	1100	551613-07	0,9	2,3	29,5
1764502-77	440	60	3400	565192-11	1,8	3,4	30
1764502-76	440	60	1700	551590-05	1,3	2,9	30
1764502-75	440	60	1100	551613-05	0,9	2,4	29,5
1764502-74	400	50	2800	565192-02	1,5	3,2	30
1764502-73	400	50	1400	551590-10	1,1	2,8	30
1764502-72	400	50	900	551613-10	0,75	2,3	29,5
1764502-71	230	60	3400	565192-18	1,8	6,5	30
1764502-70	230	60	1700	551590-09	1,1	4,2	30
1764502-69	230	60	1100	551613-09	0,75	3,5	29,5
1764502-68	230	50	2800	565192-09	1,5	5,6	30
1764502-67	230	50	1400	551590-11	1,1	4,9	30
1764502-66	230	50	900	551613-11	0,75	4,0	29,5
1764502-65	—	—	—	Pump without motor	—	—	17
Article No.	—	—	—	Motor (included)	—	—	Weight (kg)
Complete Set	—	—	—	Article No.	—	—	A
—	—	—	—	rpm	—	—	—
—	—	—	—	Hz	—	—	—
—	—	—	—	Voltage	—	—	—
—	—	—	—	kW	—	—	—

Ref. 1764502 Rev. 5

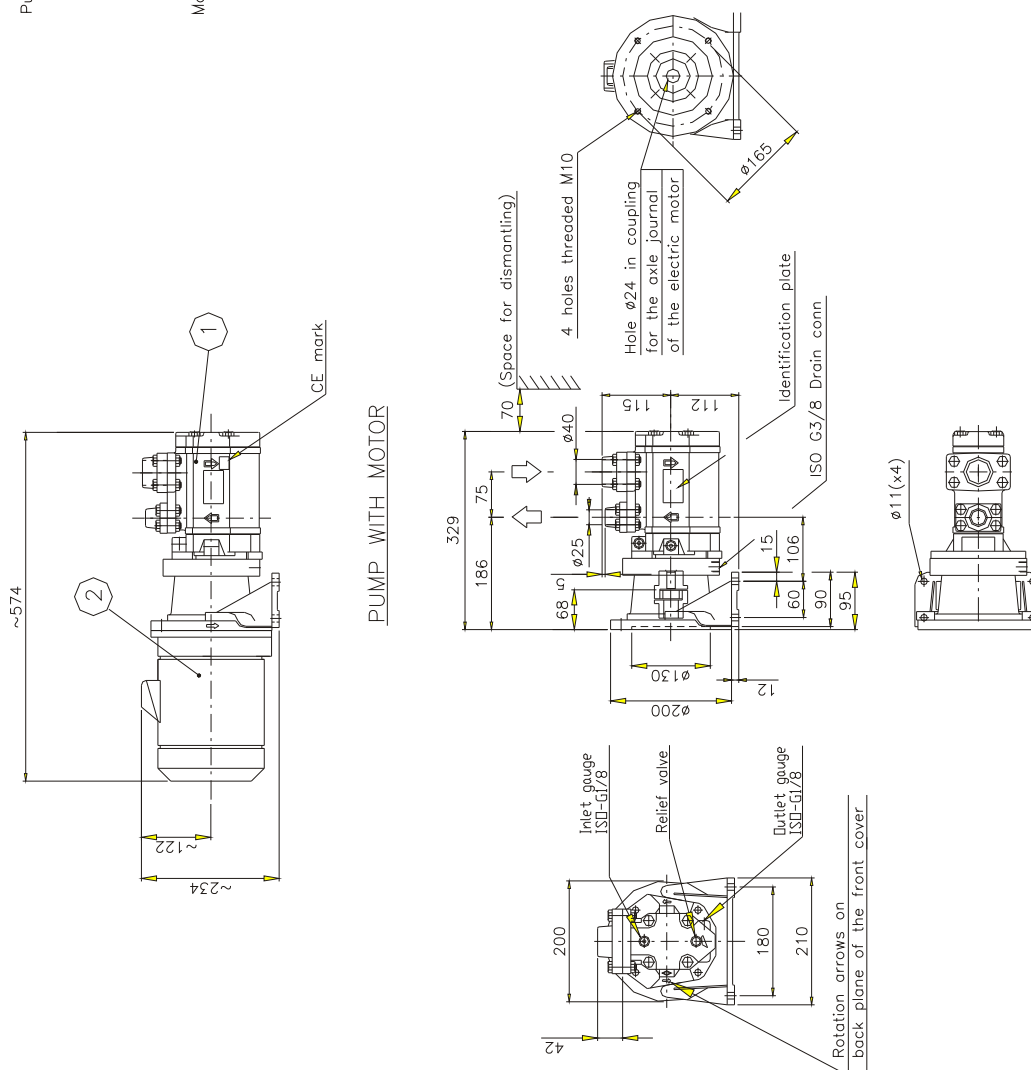

PUMP WITHOUT MOTOR