



7.10.1.2-5 Technical data and dimensions, 038 K3


TECHNICAL DATA

Pump: The pump is of positive displacement type  
 Media: Fuel oil and lubricating oil  
 Media temperature: Max 120°C  
 Max feeding pressure: 0,3 MPa (3 bar)  
 Material pump body: Nodular cast iron  
 Material pump screw: Steel and cast iron  
 Suction head 4 m Wc monometric  
 0 m Wc monometric for 2800 rpm and 3400 rpm  
 Built on safety valve: Opening setting 0,6 MPa (6 bar)


Motor: Totally enclosed three phase motor for marine applications  
 Insulation acc. to class F  
 Enclosure: IP55

Dimensions in mm

Article No. Complete Set	Voltage	Hz	rpm	Motor (included) Article No.	kW	A	Weight (kg)
1764503-90	690	60	3400	565197-16	2,8	3,3	3,8
1764503-89	690	60	1700	551614-17	1,9	2,4	3,6
1764503-88	690	60	1100	551615-17	1,3	2,0	3,6
1764503-87	690	50	2800	565197-07	2,5	3,0	3,8
1764503-86	690	50	1400	551614-11	1,5	1,9	3,6
1764503-85	690	50	900	551615-11	1,1	1,8	3,6
1764503-84	575	60	1700	551614-06	1,9	2,9	3,6
1764503-83	480	60	3400	565197-13	2,8	4,8	3,8
1764503-82	480	60	1700	551614-15	1,9	3,5	3,6
1764503-81	480	60	1100	551615-15	1,3	2,9	3,6
1764503-80	460	60	3400	565197-12	2,8	5,0	3,8
1764503-79	460	60	1700	551614-14	1,9	3,6	3,6
1764503-78	460	60	1100	551615-14	1,3	3,1	3,6
1764503-77	440	60	3400	565197-11	2,8	5,2	3,8
1764503-76	440	60	1700	551614-05	1,9	3,8	3,6
1764503-75	440	60	1100	551615-05	1,3	3,2	3,6
1764503-74	400	50	2800	565197-02	2,5	5,2	3,8
1764503-73	400	50	1400	551614-07	1,5	3,3	3,6
1764503-72	400	50	900	551615-07	1,1	3,0	3,6
1764503-71	230	60	3400	565197-18	2,8	9,9	3,8
1764503-70	230	60	1700	551614-18	1,9	7,3	3,6
1764503-69	230	60	1100	551615-18	1,3	6,1	3,6
1764503-68	230	50	2800	565197-09	2,5	9,0	3,8
1764503-67	230	50	1400	551614-12	1,5	5,8	3,6
1764503-66	230	50	900	551615-12	1,1	5,3	3,6
1764503-65	—	—	—	Pump without motor	—	—	20
Article No. Complete Set	Voltage	Hz	rpm	Motor (included) Article No.	kW	A	Weight (kg)

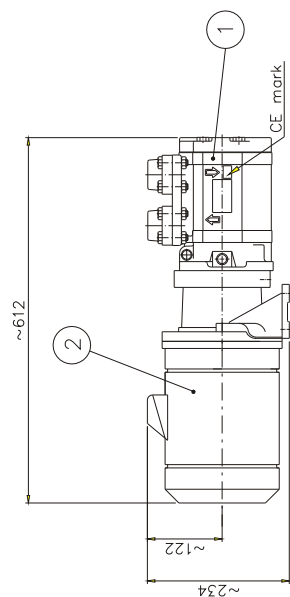

PUMP WITH MOTOR

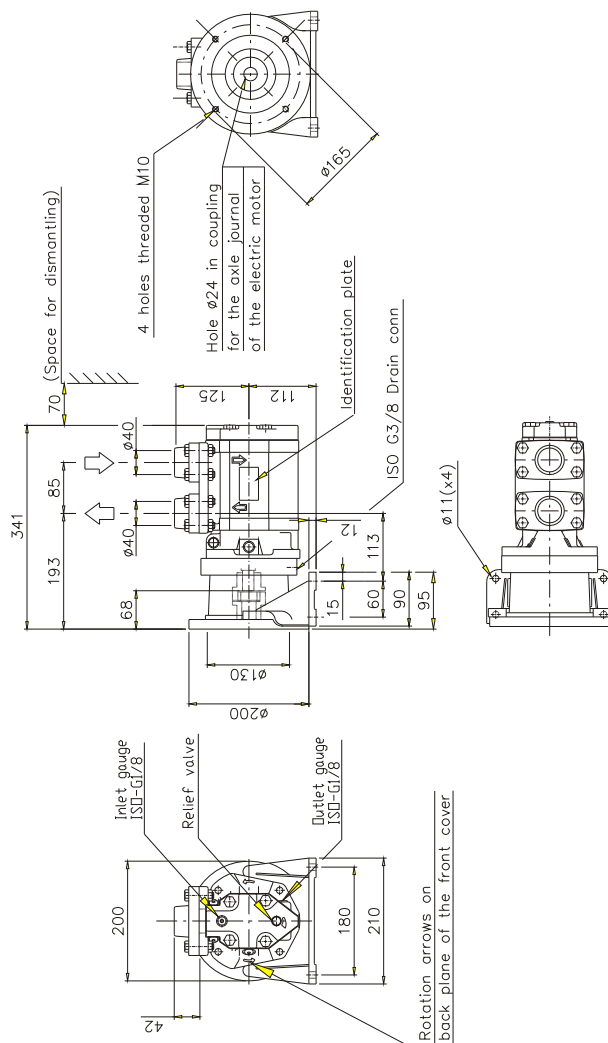

PUMP WITHOUT MOTOR

Ref. 1764503 Rev. 5